





- ▶ Magazines for highest efficiency and best performance
- ▶ Quick width adjustment in less than 5 seconds due to rack and pinion system and preinstalled ramp system
- ▶ Highest stability and 70% faster assembly due to intelligent design
- ▶ Durable plastic base, 30% stronger than the industry standard
- ▶ Different types of magazines with cardguides that have different heat resistances.
- ▶ ESD Safety
- Options:
 - ▶ Stopper bars
 - ▶ Labels with slot numbers


Caution: The listed temperatures apply only to the cardguides. Magazines of these types should not be placed in ovens.

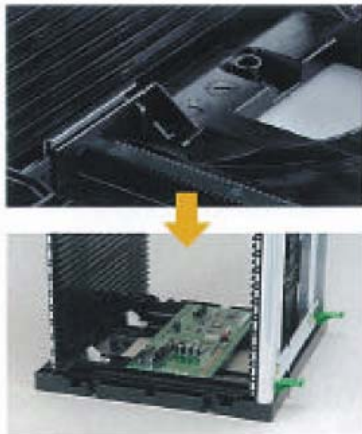

Put the PCB on the center of the base.

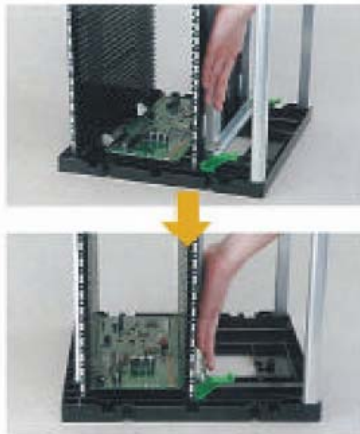

Slide the movable side towards the PCB until it cannot slide any further.

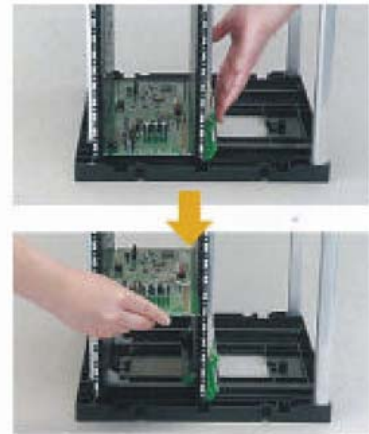

Lock all four levers and remove the PCB. The PCB will now slide smoothly into each slot with 1 mm clearance.

Model	Max. Temp. Leiterplatte	Outer dimensions in mm			Width adjustment J	Bases	Pitch P	PCB Slots	Reference position		Weight	Size
		L	B	H					C	D		
N25C	60°C	355	320	563	50 ~ 250	Plastic	10	50	34	34	4 kg	M
R25C	135°C	355	320	563	50 ~ 250	Plastic	10	50	34	34	4 kg	M
SR25C	165°C	355	320	563	50 ~ 250	Plastic	10	50	34	34	4 kg	M

Reversible Magazines – Ultra Light
N25C / R25C / SR25C

NIKKO RACK Specifications

model	guide rail temperature limit	size[mm]			adjust width [mm]	Ref. position		base material	weight [kg]
		H	w	D		A	B		
<u>R25C</u> <i>new!!</i>	135 deg C / 275 deg F	563	320	355	50-255	34	34	plastic	4.0
<u>T25C</u> <i>new!!</i>	135 deg C / 275 deg F	581	320	355	50-250	35	35	plastic	4.0
NKAJ-0525N	60 deg C / 140 deg F	563	320	355	50-255	34	34	Metal	5.1
NKAJ-0525N2	60 deg C / 140 deg F	563	320	355	50-255	34	34	Plastic	3.7
NKAJ-0525R	135 deg C / 275 deg F	563	320	355	50-255	34	34	Metal	5.2
NKAJ-0525SR	165 deg C / 329 deg F	563	320	355	50-255	34	34	Metal	5.2
NKAJ-0525R2	135 deg C / 275 deg F	563	320	355	50-255	34	34	Plastic	3.8
NKAJ-0525SR2	165 deg C / 329 deg F	563	320	355	50-255	34	34	Plastic	3.8
NKAJ-0531R	135 deg C / 275 deg F	570	380	535	50-310	34	41	Metal	9.4
NKAJ-0531SR	165 deg C / 329 deg F	570	380	535	50-310	34	41	Metal	9.4
NKAJ-0733R	135 deg C / 275 deg F	565	400	460	70-330	35	35	Metal	8.8
NKAJ-0733SR	165 deg C / 329 deg F	565	400	460	70-330	35	35	Metal	8.8
NKAJ-0539R	135 deg C / 275 deg F	570	460	535	50-390	34	41	Metal	10.5
NKAJ-0539SR	165 deg C / 329 deg F	570	460	535	50-390	34	41	Metal	10.5
NKAJ-0546R	135 deg C / 275 deg F	563	530	535	50-460	34	34	Metal	12.3
NKAJ-0546SR	165 deg C / 329 deg F	563	530	535	50-460	34	34	Metal	12.3
NKAJ-0525R-G400	135 deg C / 275 deg F	563	320	400	50-255	34	34	Metal	6.8
NKAJ-0525SR-G400	165 deg C / 329 deg F	563	320	400	50-255	34	34	Metal	6.8
NKAJ-0531R-G400	135 deg C / 275 deg F	563	380	400	50-310	34	34	Metal	7.7
NKAJ-0733R-G400	135 deg C / 275 deg F	563	400	400	70-330	34	34	Metal	7.8

** Basic flute width -pitch- is 10mm.

** Surface resistance : $10^4 - 10^6$ ohm · cm